


VARIABLE INTERFACE SYSTEM

PIN INSTALLATION

OTHER STYLES OF SIGHTS CAN BE INSTALLED WITH SPRINGFIELD ARMORY'S UNIQUE VIS PLATE SYSTEM.

1. Remove the cover plate and replace with the plate for your sighting system. Plates are available directly from Springfield Armory® for several different mounting standards.
2. Install the plate designed for your sight and anchor with the 8-32 screws that secure the cover plate, do not exceed 18 in-lbs of torque.
3. Install the red dot sight to the plate using the manufacturers recommendations/directions.

NOTE: Verify the red dot sight screws do not protrude from the bottom of the plate. If they do, shorten the screws or replace them with ones of the correct length. Using screws that are too long will not anchor the sight properly and may damage the plate.

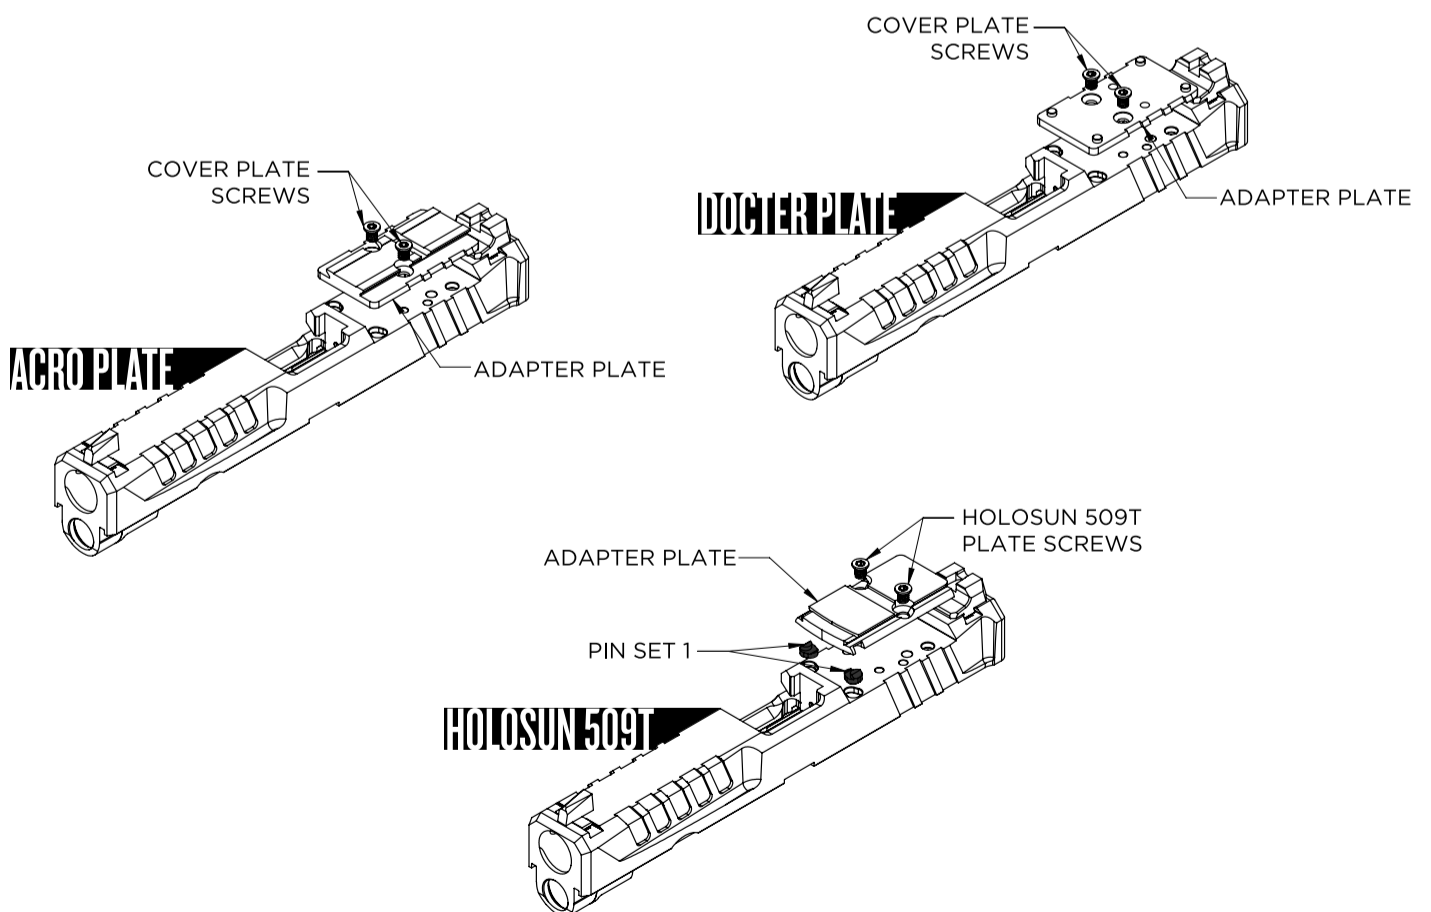

WARNING

Never attempt to install sights with the slide on the frame.



WARNING

Make sure the firearm is completely unloaded, magazine removed & chamber clear.